


ARH

- ▶ 5.0*3.2*0.8mm, 4P
- ▶ ±10ppm 高精度、高频率稳定性
- ▶ 滚边焊、满足无铅焊接的回流温度曲线要求
- ▶ -40°C ~ +125°C, 优良的耐环境特性
- ▶ 符合 RoHS、Reach、AEC-Q200 认证标准

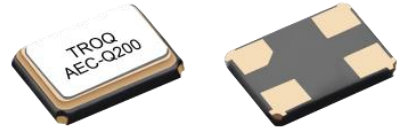


技术参数 Technical Parameter

频率范围	Frequency Range	8 ~ 54MHz
高阶谐振	Overtone	Fundamental
频率稳定度	Frequency Tolerance (at 25°C)	±10ppm, ±20ppm, ±50ppm or specify
工作温度范围内频率稳定度	Frequency Stability Over Operating Temperature Range	±50ppm Max.
工作温度范围	Operating Temperature Range	-40 ~ +125°C, or specify
驱动电平	Drive Level	100uW typical
负载电容	Load Capacitance	12pF, or specify
储存温度范围	Storage Temperature Range	-40 ~ +125°C
可靠性标准	Reliability Standard	AEC-Q200

等效串联电阻 (ESR)

频率范围	谐振电阻
8 ~ 12MHz	120Ω Max.
12 ~ 20MHz	80Ω Max.
20 ~ 30MHz	60Ω Max.
30 ~ 54MHz	40Ω Max.

外观尺寸 Dimension(Unit:mm)

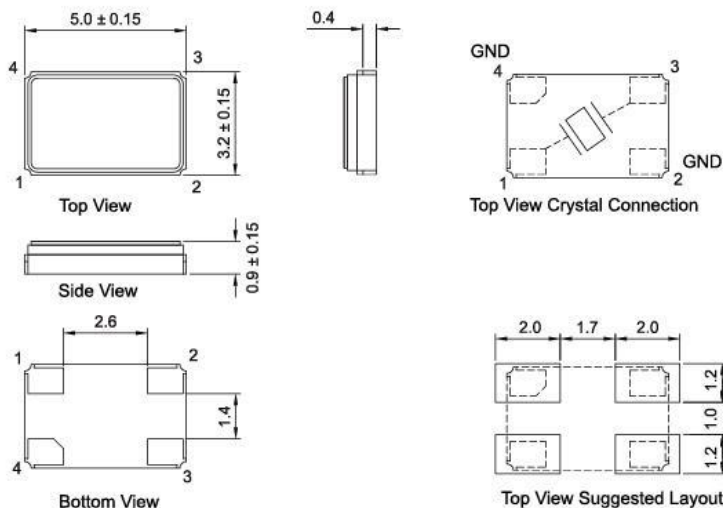

Units:mm